

QVidium® Professional Video Codec

QVPRO H.264 IP Video Codec

QVidium® QVPRO Codecs provide reliable, high-performance solutions to coding and transport of SD and HD video and audio signals for broadcast applications.

Advanced H.264 High Profile compression, coupled with QVidium's patented Video Transport and Error correction, maintains broadcast quality video distribution over nearly any IP network, including wireless networks and the Internet.



The QVPRO is part of the QVidium® professional line of advanced video codecs; a line of compact, powerful and cost-effective products designed for real-time encoding, decoding and transcoding for Content Gathering, Monitoring, and Distribution of broadcast quality video over IP networks.

QVidium's advanced video transport couples broadcast and networking standards with patented error correction to take advantage of the inherent flexibility of IP and the Internet, providing broadcasters an efficient, affordable and scalable solution for professional quality video distribution quality over nearly any IP network.

The QVPRO provides H.264 High Profile video compression, up to **1080p50/60**, along with support for up to 4 audio channels, multicasting and multi-unicasting, and closed captioning to allow cost-effective audio/video broadcast and IPTV solutions.



Applications

- Professional broadcast video distribution
- Live Event / Electronic News Gathering
- Confidence monitoring
- Video conferencing
- IPTV systems

Key Features

- **Real-time HD Video Encoding & Decoding**
 - MPEG-4 AVC / H.264 High, Main and Baseline
 - ▶ Only 1.5 to 6 Mbps required for HD Encoding
 - ▶ Supports CBR & VBR bitrates up to 30 Mbps
 - ▶ Up to level 4.1
 - MPEG-2 Main Profile
 - Up to 4 audio channels (2 stereo pairs)
 - Video formats up to **1080p50/60**, PAL & NTSC
 - IP or ASI encoded audio/video input and output
 - Full-Duplex HD or SD Encoding & Decoding
 - Up & Down Scaling and frame rate conversion
 - Dual encoding from same input
- **Real-time High Quality Transcoding**
 - DVB-ASI or Ethernet, input or output
 - Up & Down Scaling and frame rate conversion
- **Robust transmission of Video & Audio**
 - Patented QVidium® ARQ error correction
 - Industry std. ProMPEG FEC (encoder only)
 - MPEG Transport Stream
- **Compact, cost-effective solutions**
 - Complete transmitter / receiver ½ width - 1RU
 - User configurable as transmitter and receiver
- **User-friendly configuration and control**
 - WEB-based remote configuration & control
 - SNMP Trap support for NMS systems

QVPRO H.264/MPEG2 IP Video Codec

QVidium® Professional Video Codecs

QVPRO H.264 IP Video Codec

Specification

Video/Audio Interfaces

Input: 1x 3GSDI* / HDSDI / SDI / ASI (SMPTE 425M (A&B), 424M, 292M, 259M, ASI), 1x HDMI (1080i & 720p only)
Output: 1x 3GSDI / HDSDI / SDI / ASI (SMPTE 425M(A&B), 424M, 292M, 259M, ASI), 1x HDMI (1080i/p,720p,480i & 576i)
Connectors: 2 Female BNC (SDI/DVB-ASI), 2 HDMI

Video Encoding & Transcoding (HD & SD)

Video Encoding: MPEG4-AVC (H.264)
 ▶ High Profile, up to Level 4.1
 ▶ High, Main, and Baseline Profiles
MPEG-2 Main Profile
Constant bit rate or Variable bit rate
Bit rate: 128 Kbps to 30 Mbps
Transcoding: H.264 ↔ MPEG-2, H.264 ↔ H.264
Constant bit rate or Variable bit rate
Closed Captioning: EIA-608 (SD Encoding-only)
Full-Duplex: Bidirectional, simultaneous HD or SD*
Operation: encoding and decoding

Audio Encoding / Decoding / Transcoding

Audio Encoding: MPEG-1 Layer2, MPEG-2 & MPEG-4 AAC
Sample rate: 32, 44.1, & 48 KHz
Bit rate: 16 Kbps (mono) to 384 Kbps (stereo)
Audio Channels: Up to 4 mono-audio channels (2 stereo pairs*), MPEG1Layer2↔MPEG4AAC
Transcoding: AC3 Pass-through

IP Encapsulation

IP Encapsulation: MPEG-2 Transport Stream over RTP/UDP/IP or UDP/IP
IP Bitrate: 160 Kbps to 30 Mbps, 15Mbps w/ARQ
Error Correction: QVidium® ARQ (feedback-based)
US Patents: 7551647 & 7522528;
SMPTE 2022 FEC anx B, ENC ONLY

Video Resolutions

SD Video 625 lines, 25 frames/s (576i)
525 lines, 29.97 frames/s (480i)
HD Video 1080p60/50/30/25/24, 1080i60/50 and 720p60/50

Storage & Network Interfaces

Networking ports: 10/100/1000 Base-TX Gigabit Ethernet
Protocols: IEEE802.3 Ethernet
RTP, IPv4, TCP/UDP, IGMP v3
Connectors: 2 RJ45
External storage: Flash & Hard drives via 2 USB connectors

Control and Management

Type: 10/100/1000 Base-T Gigabit Ethernet
Features: Element control through HTTP/WEB.
SNMP traps for integration with Network Management System (NMS)
Protocol: HTTP, SNMP v2 traps
Connector: RJ45
USB Ports: 2
Maintenance Port: Two RS232 9 pin D-SUB

Physical and Power

Input Voltages: 120-240VAC, 50-60Hz or 7-20 VDC
Input Currents: 150-75 mA for AC or 3.0-1.0 A for DC
Input Power: 18W
DC Connector: 2.5mm I.D. x 5.5mm O.D. x 9.5mm Female
Chassis: 209 x 182 x 44 mm (WxDxH)
Two units in 19" 1RU rack space
Installation: 19" 1 RU rack mounting kit



Environmental Conditions

Operating Temperature: 0°C - +55°C
Storage Temperature: -20°C - +70°C
Relative Humidity: 5% to 95%(non condensing)

Compliance

CE: 73/23/EEC (Low voltage equipment)
89/336/EEC (Electromagnetic compatibility)
Safety: IEC60950 and EN60950
EMC: EN55022, EN55024, EN6100-3-2

Front & Rear Connection Diagrams

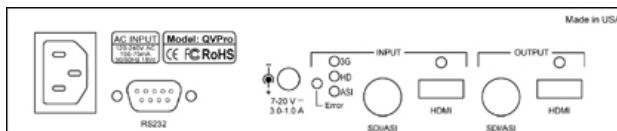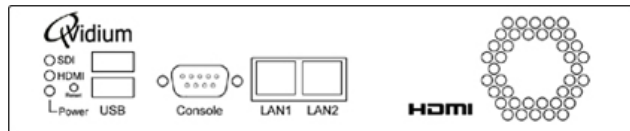

Ordering Information

Model #: QVPRO (*options: QVPRO-1080p, QVPRO-1080i/720p, QVPRO-BiDir, QVPRO-4chAudDec)

QVidium Technologies, Inc.
12989 Chaparral Ridge Rd. Tel: +1 858 792 6407
San Diego, CA 92130 USA Fax: +1 858 792 9131

Email: info@qvidium.com
WEB: <http://www.qvidium.com>

QVPRO H.264/MPEG2 IP Video Codec